

<b>Model</b>	Aurale CIC		<b>Style</b>	CIC
<b>Fitting Range</b>	Mild to moderate hearing loss			
<b>Channels</b>	10			
<b>Bands</b>	15			
<b>Matrix</b>	112/40/x			
<b>Battery</b>	10A	<b>Current Consumption</b>	<1 mA	




<b>F U N C T I O N</b>	<ul style="list-style-type: none"> <li>● WDRC</li> <li>● Feedback suppression</li> <li>● Dual time constants</li> <li>● Low Level Expansion</li> <li>● Multi-memory</li> <li>● Noise attenuation algorithm</li> <li>● Adjustable noise reduction</li> <li>● Multi TK fitting</li> </ul>	<b>Manual Volume-Control</b>	No
		<b>Programmable Parameters</b>	<ul style="list-style-type: none"> <li>● Gain at each channel</li> <li>● TK at each channel</li> <li>● MPO at each channel</li> <li>● MPO TK at each channel</li> <li>● Frequency Shaping</li> <li>● LLE at each channel</li> <li>● NAA 1/2/OFF</li> </ul>


### ANSI S3.22-1996 Technical Data

<b>Frequency Range</b>	200-7500Hz	
<b>Peak Gain</b>	40 dB	
<b>Peak Output</b>	112 dB	
<b>Reference Test Gain</b>	29dB	
<b>HFA Output</b>	106 dB	
<b>HFA Gain</b>	32dB	
<b>Equivalent Input Noise</b>	<25 dB	
<b>THD</b>	<b>Typical</b>	
	<b>500 Hz</b>	1 % < 5%
	<b>800 Hz</b>	1 % < 5%
	<b>1600 Hz</b>	1 % < 5%
<b>SLOW</b>	<b>Attack Time</b>	500 ms
	<b>Release Time</b>	2000 ms
<b>FAST</b>	<b>Attack Time</b>	50 ms
	<b>Release Time</b>	500 ms

### Fitting Range

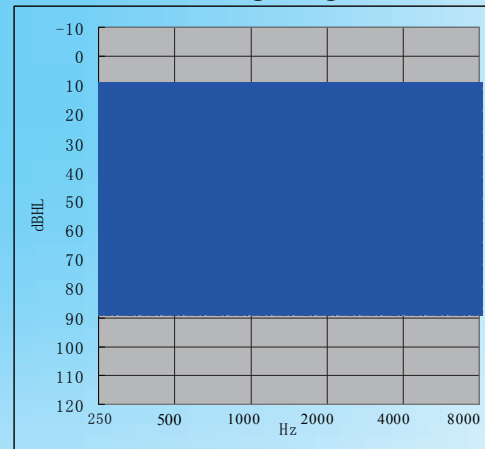

### OSPL90 Curve

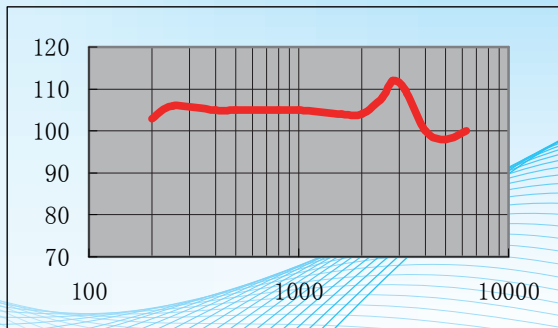

### Gain Curve

