

SPECIFICATIONS

**G-series
ITC SPECIFICATIONS**




Features

- High fidelity sound quality
- Low power consumption
- Optional multi memories
- Dual-Channel WDRC digital processing
- Independent 2-channel level detection
- Low level expansion
- PC based fitting software
- Support Binaural Fitting


Technical Data ANSI S3.22-1996!

Frequency Range		100-6500HZ
Peak Gain		40 dB
Peak Output		115 dB
Reference Test Gain		35 dB
Current Drain at RTG		< 1 mA
Equivalent Input Noise at RTG		< 25 dB
THD at RTG	500 Hz	< 7% (typical 3%)
	800 Hz	< 7% (typical 3%)
	1600 Hz	< 5% (typical 1%)
SLOW	Attack Time	4 ms
	Release Time	512 ms
FAST	Attack Time	1 ms
	Release Time	16 ms


Suggest Fitting Range

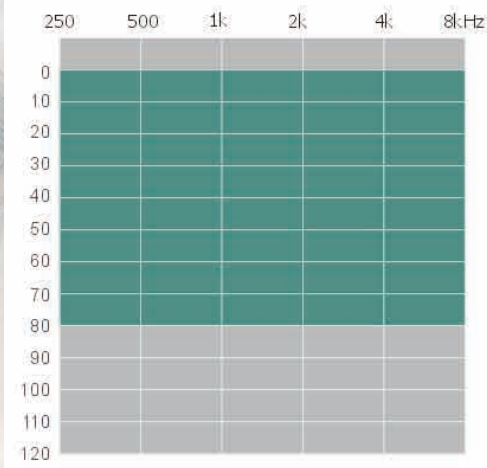


Maximal Output

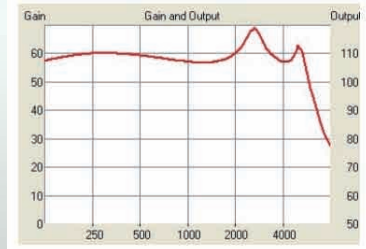

High Cut

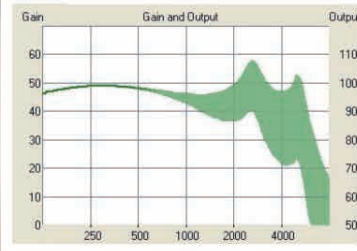

Low Cut

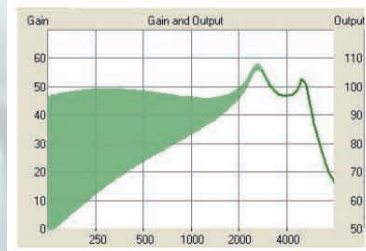

Ver 2.0 Copyrights reserved ©2009