

G-series


Open BTE SPECIFICATIONS




Features

- Open style shell
- Crystal clear sound quality
- Low power consumption
- Optional dual programs for different listening environment
- Parametric filter available
- Flexible 4-channel WDRC sound processing strategies
- In-channel and wideband detectors compression system
- Effective low level expansion (0.3:1 ratio)
- ASP Noise Reduction system
- Simple feedback manager possible
- True on -screen binaural fitting to achieve the best possible performance
- User friendly multilingual software with fitting assistant functions
- Stand-alone fitting software with client management
- Support Hi-Pro, MicroCard and Noahlink

aximal Output

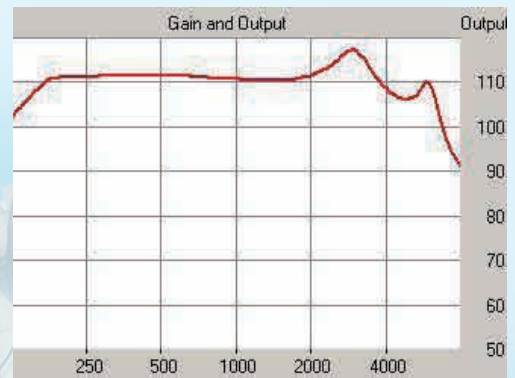

Gain Curve

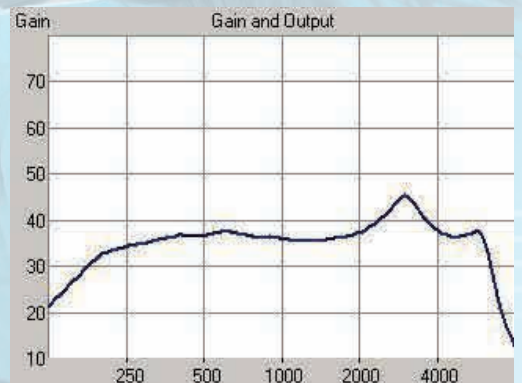

Technical Data ANSI S3.22-1996

Frequency Range	200-7500 Hz	
Peak Gain	40 dB	
Peak Output	115 dB	
Reference Test Gain	35 dB	
Current Drain at RTG	1.04mA	
Equivalent Input Noise	< 25 dB	
THD	500 Hz	< 1 %
	800 Hz	<1 %
	1600 Hz	<1 %
Time constants	Attack	5 ms
	Release	200 ms